

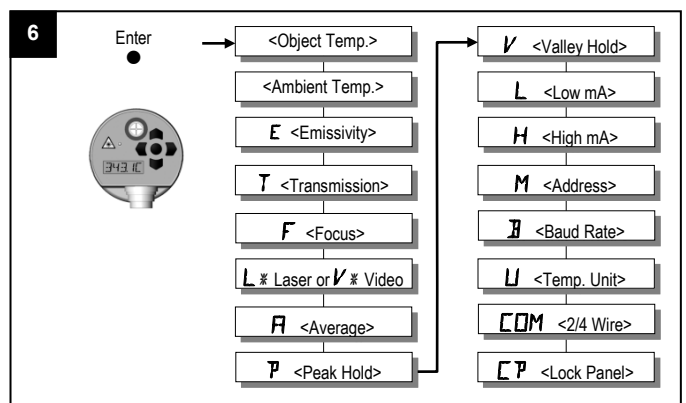
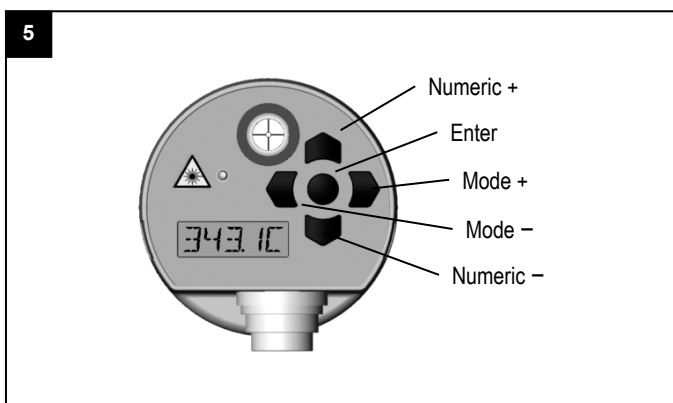
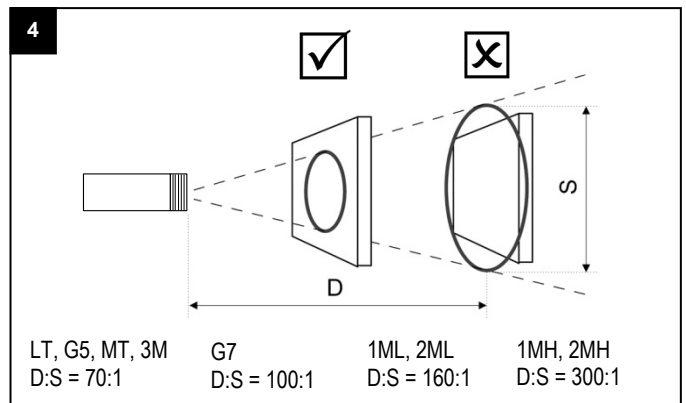
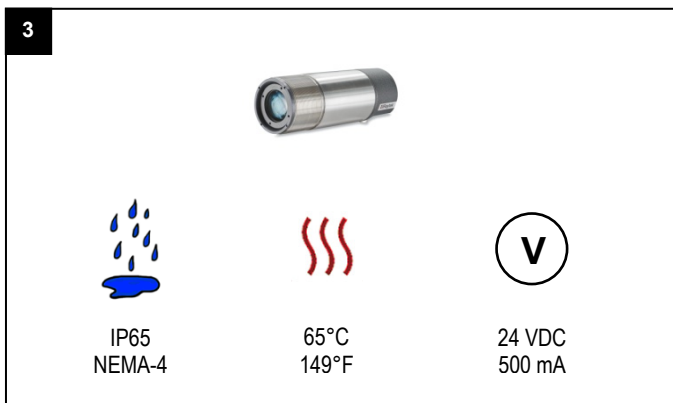
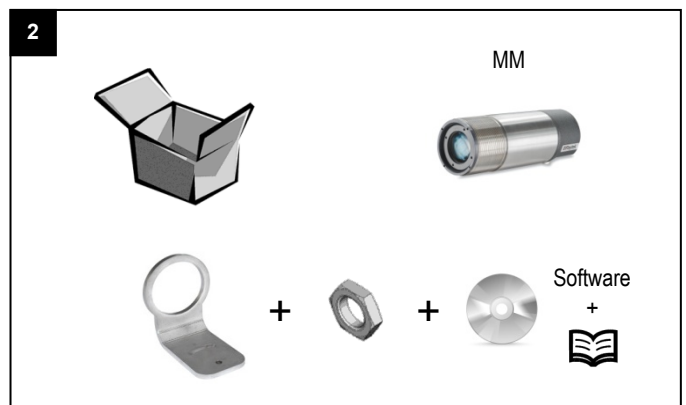
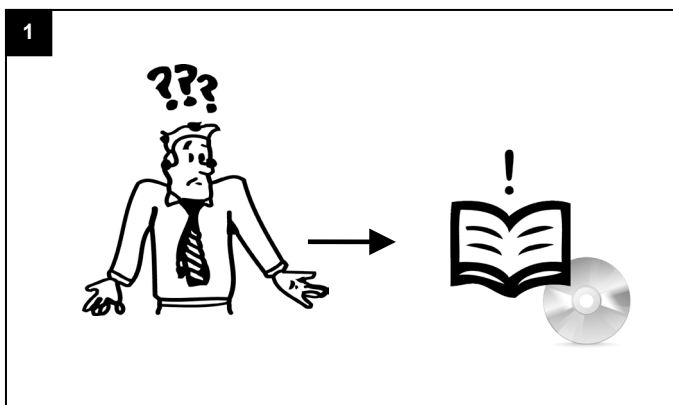
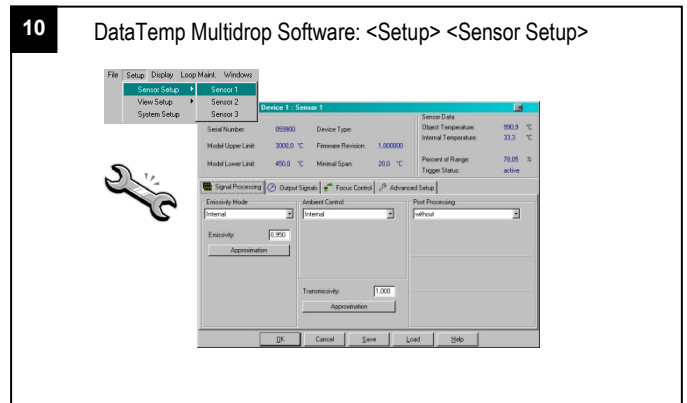
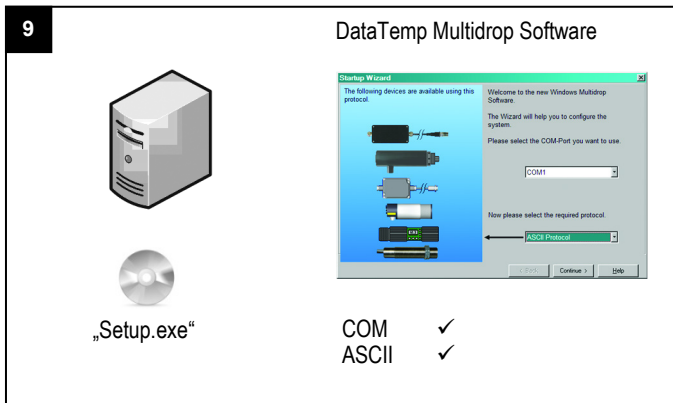


MM QuickStart

High-Performance Infrared Thermometer

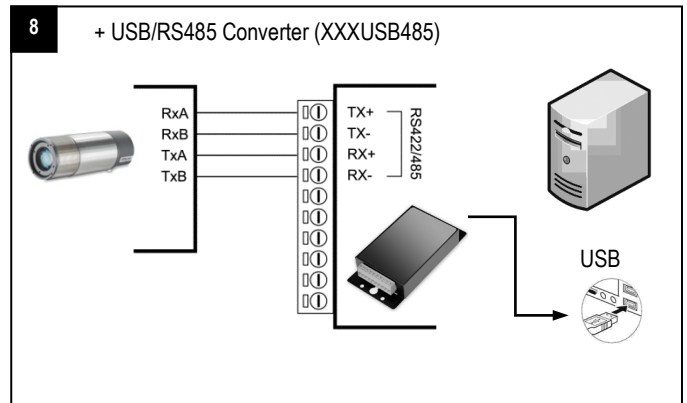

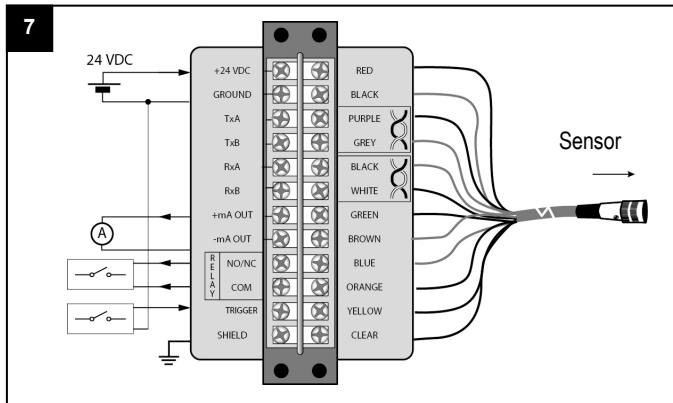

LT	-40...800°C	-40...1472°F	8 ... 14 µm
G5L	250...1650°C	482...3002°F	5 µm
G5H	450...2250°C	842...4082°F	5 µm
MT	250...1100°C	482...2012°F	3.9 µm
3M	100...600°C	212...1112°F	2 ... 2.6 µm
2ML	300...1100°C	572...2012°F	1.6 µm
2MH	450...2250°C	842...4082°F	1.6 µm
1ML	400...1740°C	752...3164°F	1 µm
1MH	540...3000°C	1004...5432°F	1 µm

www.raytek.com

58288, Rev. C, 02/2012 - Raytek and the Raytek logo are registered trademarks of Raytek Corporation. Specifications subject to change without notice. Raytek is ISO 9001 certified.

Worldwide Headquarters
Santa Cruz, CA USA
Tel: +1 831 458 – 3900
+1 800 227 – 8074
solutions@raytek.com

European Headquarters
Berlin, Germany
Tel: +49 30 47 80 08 0
Fax: +49 30 4 71 02 51
raytek@raytek.de



China Headquarters
Beijing, China
Tel: +86 10 6438 4691
info@raytek.com.cn

France
info@raytek.fr
United Kingdom
ukinfo@raytek.com

Raytek®
A Fluke Company